


INSTALLATION INSTRUCTION

4011_V2


YOU WILL RECEIVE:

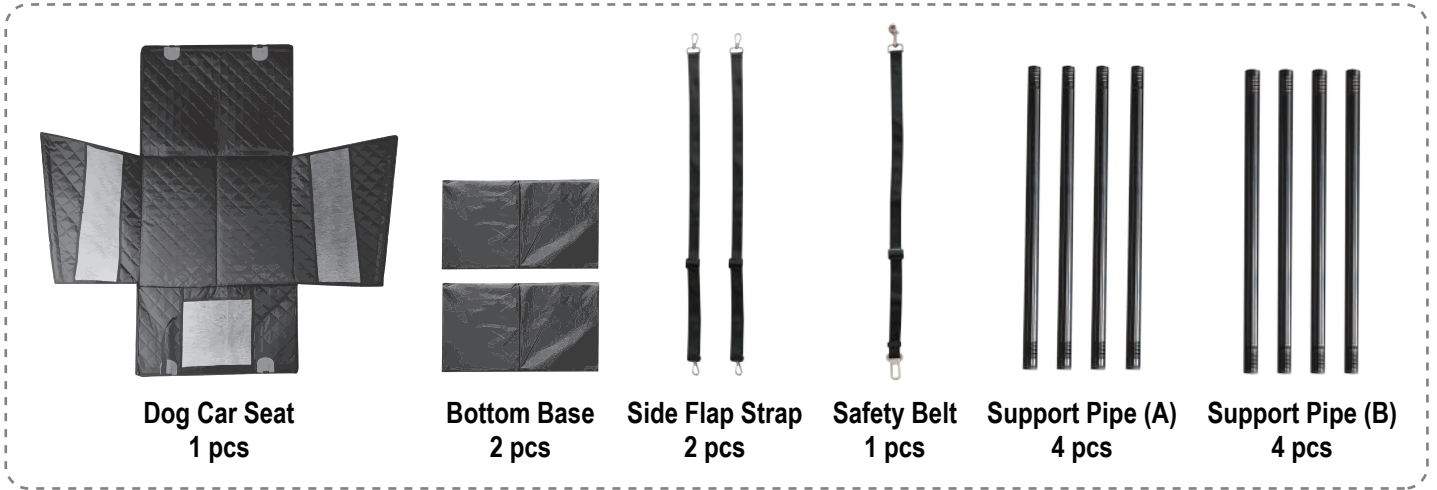


ASSEMBLY STEPS:



1. Splicing of A and B pipes according to the threads.

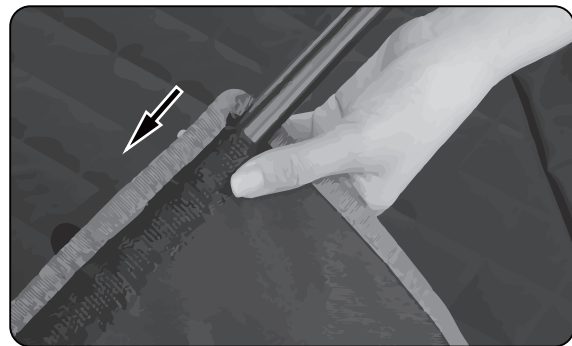

2. Place 4 pipes on each of the four side.

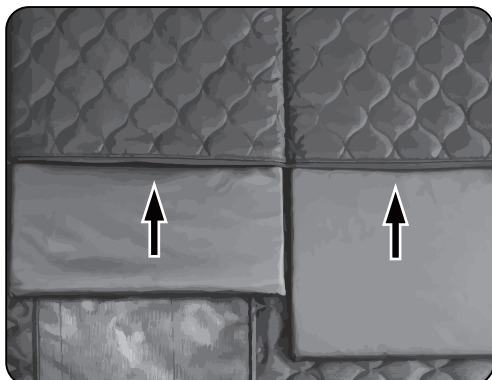


3. Insert 2 hard bottom bases into the dog car seat.




4. Pull up the 4-sided zipper.



5. Attach the 4-sided velcro.


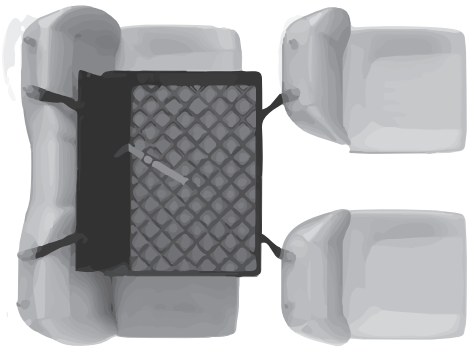


OPTION A: The Middle of the Back Seat

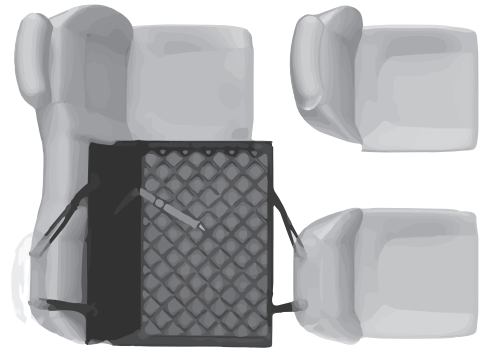


OPTION B: The Side of the Back Seat


INSTALLATION STEPS:

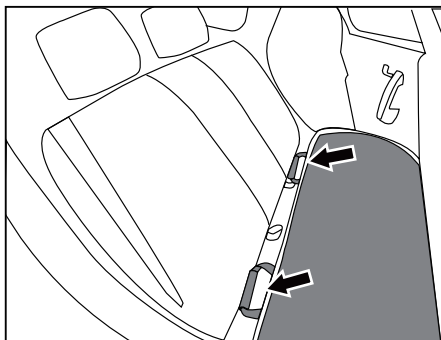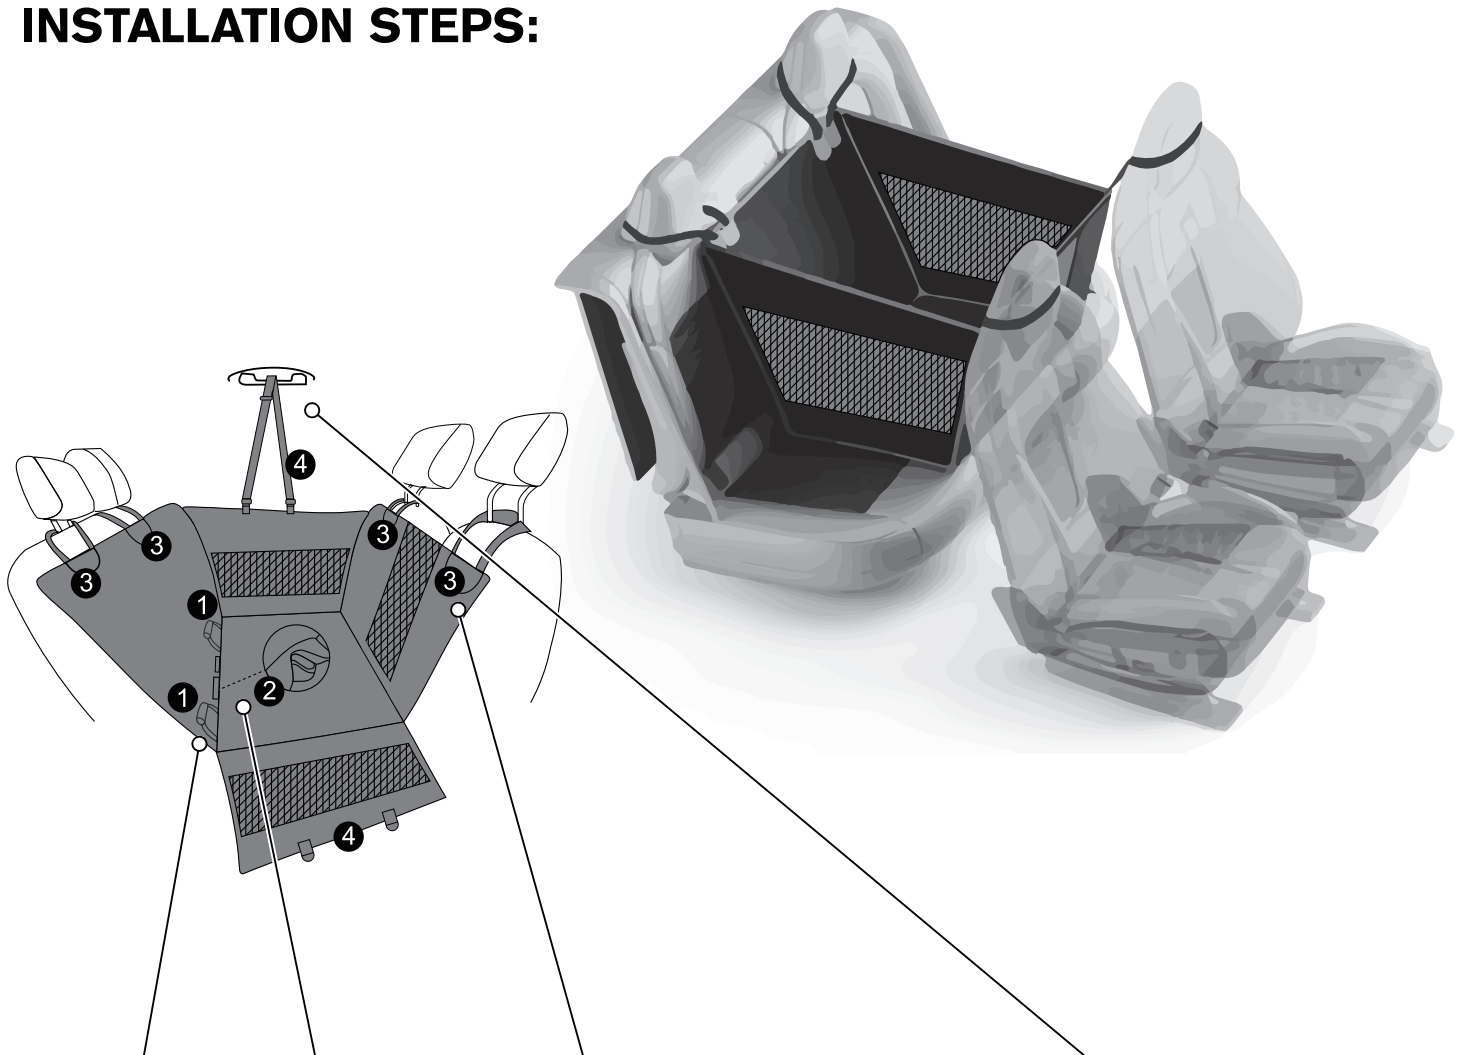

1. Tuck the two anchors to backseat.
2. Install the dog safety belt.

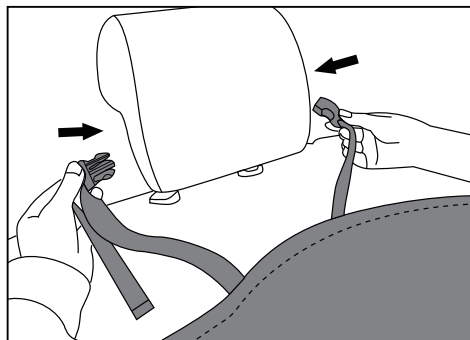

3. Snap the buckle straps to backseat headrests.

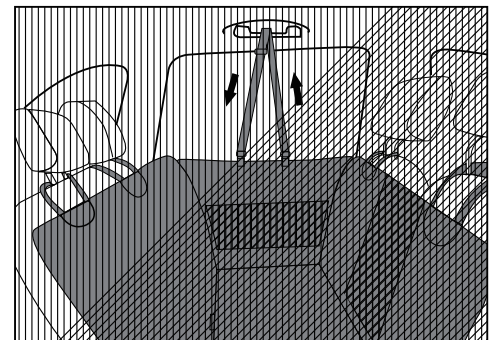

4. Connect the side flaps to car side handle with side straps.