

INSTALLATION INSTRUCTION

6001_V2.0

YOU WILL RECEIVE:



Dog Car Seat
1 pcs




Adjustable Strap
1 pcs




Safety Belt
1 pcs

Installation Steps

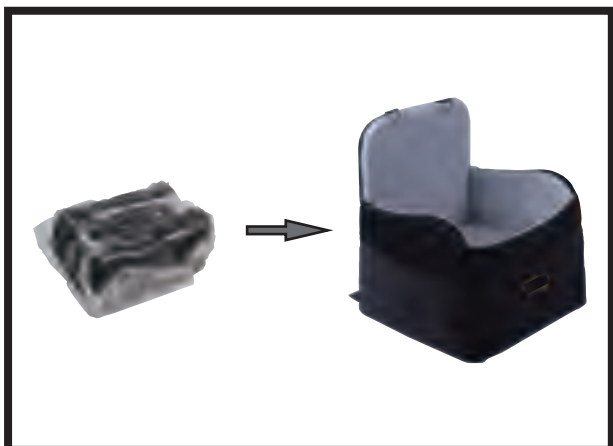

1. Allow 48 hours for the dog car seat to fully recover its shape.

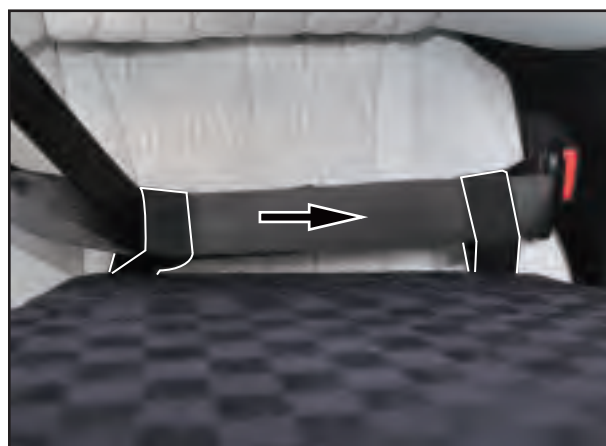

2. Thread the vehicle's seat belt through the two holes of the pet seat and buckle it.



3. Attach both hooks to the dog car seat and adjust the length of strap.



4. Clip the safety hook to your pet's harness.

Fully Detachable & Easy to Clean



1. Take the bottom cushion out.



2. Open the zipper of the bottom cushion and take out the foam cushion.



3. Turn the bottom over.



4. Open the bottom zipper.



5. Take out the foam cushion.



6. Clean the cover by machine or hand.
Friendly reminder: Sponge cannot be washed.